

2




1

PART NUMBER	DIM. A
PS100A-0131GG-P	.125"
PS100A-0132GG-P	.180"
PS100A-0133GG-P	.215"

REVISIONS		
REV.	DESCRIPTION	DATE
A	INITIAL RELEASE	9/16/2020

B

B

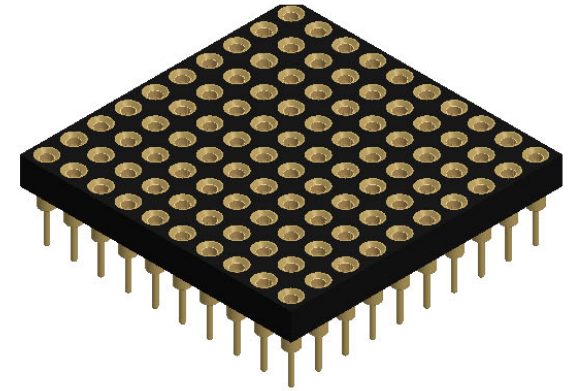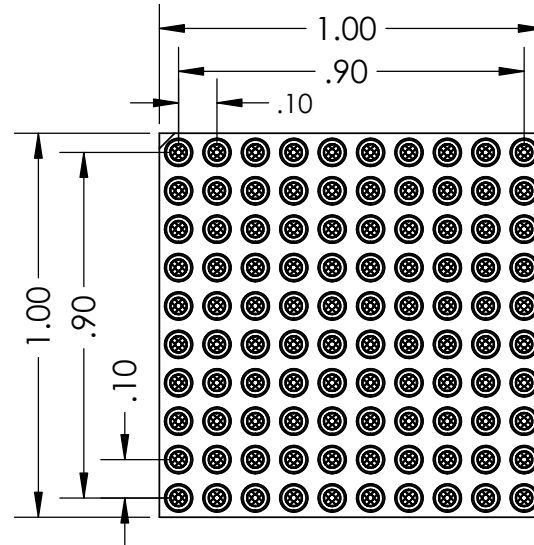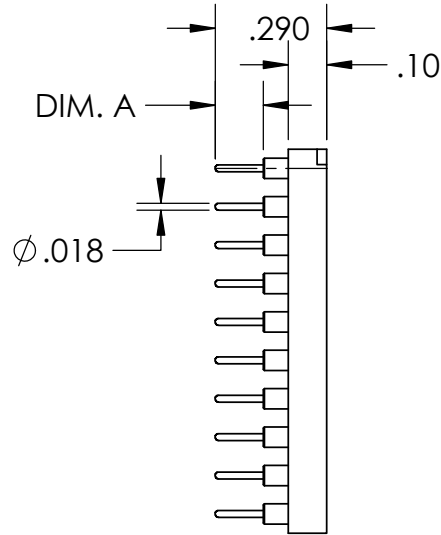


A

A

- NOTE:
- INSULATOR MATERIAL: GLASS FILLED POLYESTER
  - FLAMABILITY RATING: UL94V-0
  - OPERATING TEMP: -55C TO +125C
  - ACCEPTS -.015-.021 DIAMETER PIN
  - SHELL MATERIAL: BRASS ALLOY C36000, 1/2 HARD
  - SHELL PLATING 10µ MIN. OVER NICKEL, 100µ MIN
  - CONTACT MATERIAL: BeCu
  - CONTACT PLATING: 10µ MIN. OVER NICKEL, 100µ MIN

**PROPRIETARY AND CONFIDENTIAL**  
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ADAPTERS-PLUS INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ADAPTERS-PLUS IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:		NAME	DATE
DIMENSIONS ARE IN INCHES		DRAWN	AM 09/16/20
TOLERANCES:		CHECKED	SB 09/16/20
FRACTIONAL ± .1		ENG APPR.	
ANGULAR: MACH ± .1		MFG APPR.	
TWO PLACE DECIMAL ± .01		Q.A.	
THREE PLACE DECIMAL ± .005		COMMENTS:	
INTERPRET GEOMETRIC TOLERANCING PER:			
MATERIAL			
FINISH			
DO NOT SCALE DRAWING			

 Adapters-Plus Inc. Ph: 209-839-0200 web: www.adapt-plus.com		TITLE:	
		<b>100 PGA SOCKET          10X10 GRID</b>	
SIZE	DWG. NO.	REV	
<b>A</b>	PS100A-013XGG-P	<b>A</b>	
SCALE: 2:1		WEIGHT:	SHEET 1 OF 1

2

1