

PA900-44(Z) Data Sheet


44 pin PLCC socket/40 pin DIP 0.6" plug

Supported Device/Footprints

Using this adapter, the Altera 900 & 910 in PLCC and CLCC package can be programmed on general purpose 40 pin DIP programmers.


Mfgr	Device	Package	Device	Footprint Plug
Altera	AL900 & AL910	PLCC, CLCC	AL900 & AL910	40 pin DIP

Adapter Dimensions

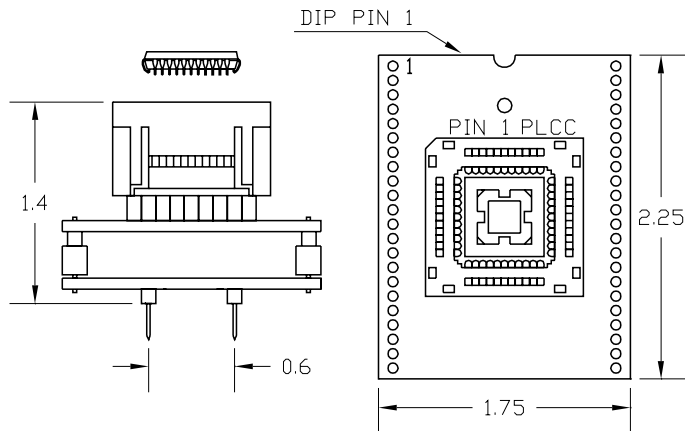

Press rim to open socket, Press device to close

PA900-44

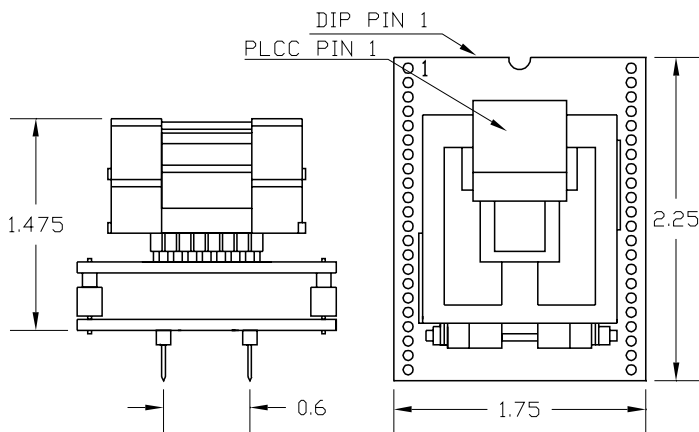

PA900-44Z

Adapter Parts & Part Numbers

The following chart shows the various socket and board part numbers that make up these adapters.

Adapter	Socket	Top Board	Bottom Board
PA900-44	44-106 or 44-306	44PL2-1 or 44PL2-3	AL900
PA900-44Z	44-400	44PL2-Z	AL900

Adapter Construction

The adapter is made up of 3 sub-assemblies. They assemble via connectors making the adapter modular. This way the sub-assemblies can be replaced when they wear out.

When disassembling the adapter take care not to bend the pins. When reassembling the adapter note the pin 1 indicators to align the parts correctly.

Test Socket

PLCC Auto-Eject test socket:

Yamaichi Part #: IC 120-0444-106

LSC #: 44-106

Yamaichi Part #: IC 120-0444-306

LSC #: 44-306

ZIF Lidded socket:

Yamaichi Part #: IC 51-0444-400

LSC #: 44-400

44PL2-1, -3, -Z

Accepts the test socket and connects to the bottom board.

AL900

Performs the wiring shown in the Adapter Wiring section

Adapter Wiring

The following chart shows the connections from the PLCC device to the adapter's DIP plug.

DEVICE	SIGNAL	PLUG	PLUG	SIGNAL	DEVICE
1	Vcc	40	40	Vcc	44
2	CLK1	1	39	Input	43
3	Input	2	38	Input	42
4	Input	3	37	Input	41
5	Input	4	36	I/O	40
6	I/O	5	-	NC	39
7	I/O	6	35	I/O	38
8	I/O	7	34	I/O	37
9	I/O	8	33	I/O	36
10	I/O	9	32	I/O	35
11	I/O	10	31	I/O	34
12	I/O	11	30	I/O	33
13	I/O	12	29	I/O	32
14	I/O	13	28	I/O	31
15	I/O	14	27	I/O	30
16	I/O	15	26	I/O	29
17	NC	-	25	I/O	28
18	I/O	16	24	Input	27
19	Input	17	23	Input	26
20	Input	18	22	Input	25
21	Input	19	21	CLK2	24
22	Gnd	20	20	Gnd	23



Adapters-Plus Inc.

P.O. BOX 900
Tracy, Ca 95378
ph.209-839-0200
fax.209-839-0235
email:sales@adapt-plus.com

www.adapt-plus.com